

CFTSP2 Self embedding, pan head, A2 stainless steel timber screw

SKU: CFTSP2 TX

PRODUCT DESCRIPTION

The Pan head A2 stainless timber screws are ideal for non-structural loads in external environments.

APPLICATIONS

Ideal for Outdoor screw connections such as solar equipment, car ports, balconies, steps, playground equipment, prefabricated houses and all supporting components

PRODUCT FEATURES


- UKTA & ETA Approved
- Cutting point
- Anti-Friction-coating
- TX drive

PRODUCT BENEFITS

- Up to 50% fewer screws are needed as the head pull-through values are considerably greater than those of a countersunk screws: Great hold
- Ensures a rapid thread grip: Easy to attach.
- The TX driving feature allows the screw to be easily and securely screwed in when the screw is attached: Wobble-free driving.

TECHNICAL DATA

Length (l):	300 mm
Diameter of head (dk):	15 mm
Height of head (k):	3.8 mm
Drive size:	TX25
Thread length (b):	70 mm
Diameter (d):	6 mm
Drive shape:	Inner multi-tooth
Thread type:	Chipboardscrew thread
Head shape:	Flat head
Tensile strength:	500 N/mm ²
Bit type:	Cutting Point

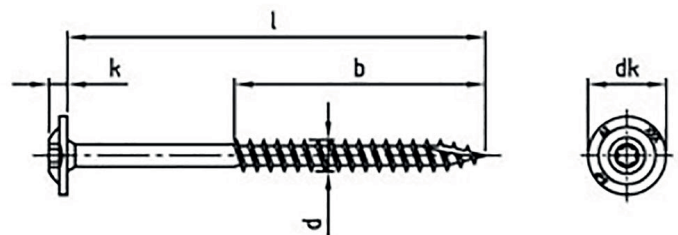



6 MM DIAMETER

SKU	Length (l)	Diameter of head (dk)	Height of head (k)	Drive Size	Thread Length (b)	Diameter (d)
CFTSP2-F 6.0×30/20 TX25	30 mm	15 mm	3.8 mm	TX25	20 mm	6 mm
CFTSP2-F 6.0×35/24 TX25	35 mm	15 mm	3.8 mm	TX25	24 mm	6 mm
CFTSP2-F 6.0×40/24 TX25	40 mm	15 mm	3.8 mm	TX25	24 mm	6 mm
CFTSP2-F 6.0×45/20 TX25	45 mm	15 mm	3.8 mm	TX25	20 mm	6 mm
CFTSP2-F 6.0×50/30 TX25	50 mm	15 mm	3.8 mm	TX25	30 mm	6 mm
CFTSP2-F 6.0×55/36 TX25	55 mm	15 mm	3.8 mm	TX25	36 mm	6 mm
CFTSP2-F 6.0×60/36 TX25	60 mm	15 mm	3.8 mm	TX25	36 mm	6 mm
CFTSP2-F 6.0×70/42 TX25	70 mm	15 mm	3.8 mm	TX25	42 mm	6 mm
CFTSP2-F 6.0×80/48 TX25	80 mm	15 mm	3.8 mm	TX25	48 mm	6 mm
CFTSP2-F 6.0×90/54 TX25	90 mm	15 mm	3.8 mm	TX25	54 mm	6 mm
CFTSP2-F 6.0×100/70 TX25	100 mm	15 mm	3.8 mm	TX25	70 mm	6 mm
CFTSP2-F 6.0×110/70 TX25	110 mm	15 mm	3.8 mm	TX25	70 mm	6 mm
CFTSP2-F 6.0×120/70 TX25	120 mm	15 mm	3.8 mm	TX25	70 mm	6 mm
CFTSP2-F 6.0×130/70 TX25	130 mm	15 mm	3.8 mm	TX25	70 mm	6 mm
CFTSP2-F 6.0×140/70 TX25	140 mm	15 mm	3.8 mm	TX25	70 mm	6 mm
CFTSP2-F 6.0×150/70 TX25	150 mm	15 mm	3.8 mm	TX25	70 mm	6 mm
CFTSP2-F 6.0×160/70 TX25	160 mm	15 mm	3.8 mm	TX25	70 mm	6 mm
CFTSP2-F 6.0×170/70 TX25	170 mm	15 mm	3.8 mm	TX25	70 mm	6 mm
CFTSP2-F 6.0×180/70 TX25	180 mm	15 mm	3.8 mm	TX25	70 mm	6 mm
CFTSP2-F 6.0×190/70 TX25	190 mm	15 mm	3.8 mm	TX25	70 mm	6 mm
CFTSP2-F 6.0×200/70 TX25	200 mm	15 mm	3.8 mm	TX25	70 mm	6 mm
CFTSP2-F 6.0×220/70 TX25	220 mm	15 mm	3.8 mm	TX25	70 mm	6 mm
CFTSP2-F 6.0×240/70 TX25	240 mm	15 mm	3.8 mm	TX25	70 mm	6 mm
CFTSP2-F 6.0×260/70 TX25	260 mm	15 mm	3.8 mm	TX25	70 mm	6 mm
CFTSP2-F 6.0×280/70 TX25	280 mm	15 mm	3.8 mm	TX25	70 mm	6 mm
CFTSP2-F 6.0×300/70 TX25	300 mm	15 mm	3.8 mm	TX25	70 mm	6 mm

Drive shape:	Inner multi-tooth
Thread type:	Chipboardscrew thread
Head shape:	Flat head
Tensile strength:	500 N/mm ²
Bit type:	Cutting Point





8 MM DIAMETER

SKU	Length (l)	Diameter of head (dk)	Height of head (k)	Drive Size	Thread Length (b)	Diameter (d)
CFTSP2-F 8.0×30 TX40	30 mm	20 mm	4.6 mm	TX40	30 mm	8 mm
CFTSP2-F 8.0×40 TX40	40 mm	20 mm	4.6 mm	TX40	40 mm	8 mm
CFTSP2-F 8.0×50 TX40	50 mm	20 mm	4.6 mm	TX40	50 mm	8 mm
CFTSP2-F 8.0×60/50 TX40	60 mm	20 mm	4.6 mm	TX40	50 mm	8 mm
CFTSP2-F 8.0×70/50 TX40	70 mm	20 mm	4.6 mm	TX40	50 mm	8 mm
CFTSP2-F 8.0×80/72 TX40	80 mm	20 mm	4.6 mm	TX40	72 mm	8 mm
CFTSP2-F 8.0×90/80 TX40	90 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×100/80 TX40	100 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×110/80 TX40	110 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×120/80 TX40	120 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×130/80 TX40	130 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×140/80 TX40	140 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×150/80 TX40	150 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×160/80 TX40	160 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×170/80 TX40	170 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×190/80 TX40	190 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×200/80 TX40	200 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×220/80 TX40	220 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×240/80 TX40	240 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×250/80 TX40	250 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×260/80 TX40	260 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×280/80 TX40	280 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×300/80 TX40	300 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×320/80 TX40	320 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×340/80 TX40	340 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×350/80 TX40	350 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×360/80 TX40	360 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×380/80 TX40	380 mm	20 mm	4.6 mm	TX40	80 mm	8 mm
CFTSP2-F 8.0×400/80 TX40	400 mm	20 mm	4.6 mm	TX40	80 mm	8 mm

Drive shape:	Inner multi-tooth
Thread type:	Chipboardscrew thread
Head shape:	Flat head
Tensile strength:	500 N/mm ²
Bit type:	Cutting Point





10 MM DIAMETER

SKU	Length (l)	Diameter of head (dk)	Height of head (k)	Drive Size	Thread Length (b)	Diameter (d)
CFTSP2-F 10.0×60/50 TX40	60 mm	25 mm	5 mm	TX40	50 mm	10 mm
CFTSP2-F 10.0×70/55 TX40	70 mm	25 mm	5 mm	TX40	55 mm	10 mm
CFTSP2-F 10.0×80/55 TX40	80 mm	25 mm	5 mm	TX40	55 mm	10 mm
CFTSP2-F 10.0×90/55 TX40	90 mm	25 mm	5 mm	TX40	55 mm	10 mm
CFTSP2-F 10.0×100/55 TX40	100 mm	25 mm	5 mm	TX40	55 mm	10 mm
CFTSP2-F 10.0×110/80 TX40	110 mm	25 mm	5 mm	TX40	80 mm	10 mm
CFTSP2-F 10.0×120/80 TX40	120 mm	25 mm	5 mm	TX40	80 mm	10 mm
CFTSP2-F 10.0×130/80 TX40	130 mm	25 mm	5 mm	TX40	80 mm	10 mm
CFTSP2-F 10.0×140/80 TX40	140 mm	25 mm	5 mm	TX40	80 mm	10 mm
CFTSP2-F 10.0×150/80 TX40	150 mm	25 mm	5 mm	TX40	80 mm	10 mm
CFTSP2-F 10.0×160/80 TX40	160 mm	25 mm	5 mm	TX40	80 mm	10 mm
CFTSP2-F 10.0×170/80 TX40	170 mm	25 mm	5 mm	TX40	80 mm	10 mm
CFTSP2-F 10.0×180/105 TX40	180 mm	25 mm	5 mm	TX40	105 mm	10 mm
CFTSP2-F 10.0×190/105 TX40	190 mm	25 mm	5 mm	TX40	105 mm	10 mm
CFTSP2-F 10.0×200/105 TX40	200 mm	25 mm	5 mm	TX40	105 mm	10 mm
CFTSP2-F 10.0×220/105 TX40	220 mm	25 mm	5 mm	TX40	105 mm	10 mm
CFTSP2-F 10.0×240/105 TX40	240 mm	25 mm	5 mm	TX40	105 mm	10 mm
CFTSP2-F 10.0×250/105 TX40	250 mm	25 mm	5 mm	TX40	105 mm	10 mm
CFTSP2-F 10.0×260/105 TX40	260 mm	25 mm	5 mm	TX40	105 mm	10 mm
CFTSP2-F 10.0×280/105 TX40	280 mm	25 mm	5 mm	TX40	105 mm	10 mm
CFTSP2-F 10.0×300/105 TX40	300 mm	25 mm	5 mm	TX40	105 mm	10 mm
CFTSP2-F 10.0×320/105 TX40	320 mm	25 mm	5 mm	TX40	105 mm	10 mm
CFTSP2-F 10.0×340/105 TX40	340 mm	25 mm	5 mm	TX40	105 mm	10 mm
CFTSP2-F 10.0×350/105 TX40	350 mm	25 mm	5 mm	TX40	105 mm	10 mm
CFTSP2-F 10.0×360/105 TX40	360 mm	25 mm	5 mm	TX40	105 mm	10 mm
CFTSP2-F 10.0×380/105 TX40	380 mm	25 mm	5 mm	TX40	105 mm	10 mm
CFTSP2-F 10.0×400/105 TX40	400 mm	25 mm	5 mm	TX40	105 mm	10mm

Drive shape:	Inner multi-tooth
Thread type:	Chipboardscrew thread
Head shape:	Flat head
Tensile strength:	500 N/mm2
Bit type:	Cutting Point

