

# CERTIFIX CF-T 300V Composite Mortar

## PRODUCT DESCRIPTION

Specialised chemical mortar designed for use with concrete screws. Vinylester styrolfree 410ml.



### Product overview


SKU	Designation	Packing Unit
CFCST-410V	Cartridge CF-T 300V	1
CFCST-MN	Mixing nozzle for CF-T 300V	1
CFCST-RG	Resin gun for CF-T 300V	1

### Processing Instructions

Temperature in ground	Processing time	Min. curing time in dry borehole	Min. curing time in wet borehole
≥ -5°C	60 min	360 min	720 min
≥ 0°C	60 min	180 min	360 min
≥ 5°C	60 min	120 min	240 min
≥ 10°C	45 min	80 min	160 min
≥ 20°C	15 min	45 min	90 min
≥ 30°C	5 min	25 min	50 min
≥ 35°C	4 min	20 min	40 min



## Installation Instructions

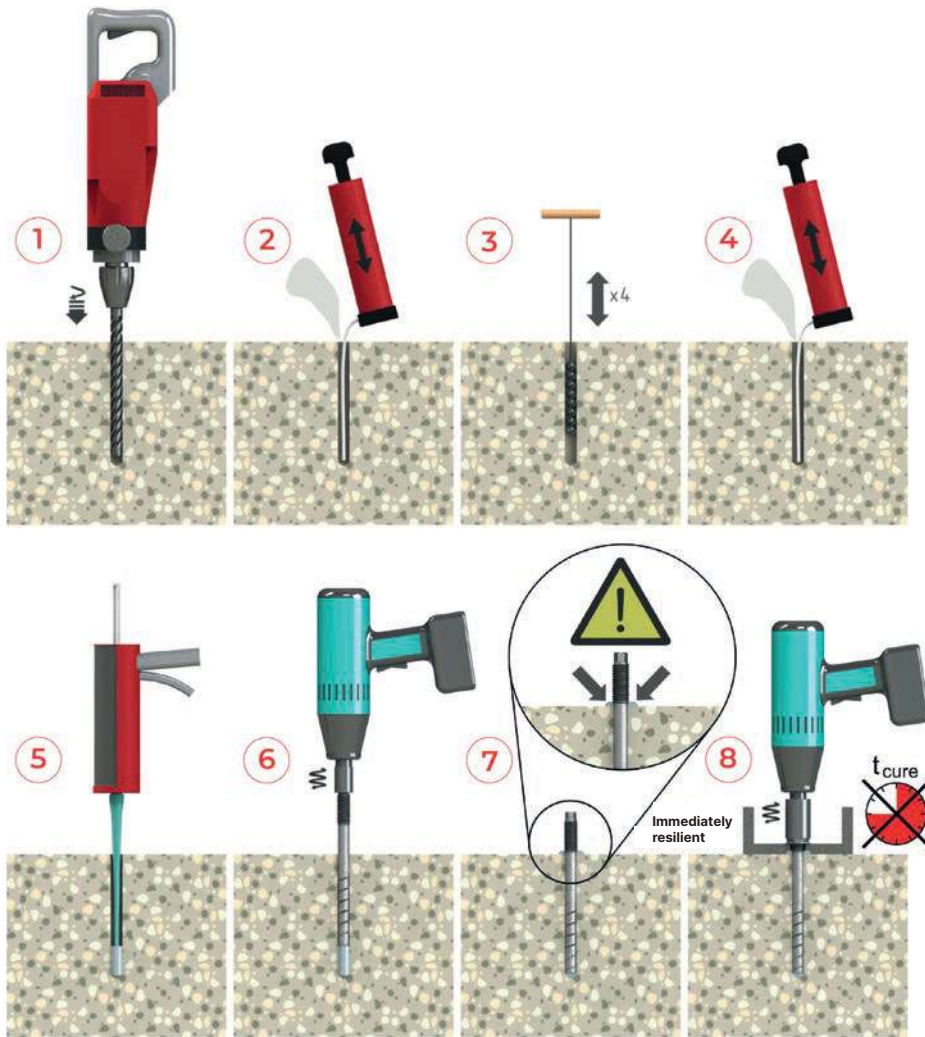

- 1) Create borehole.
- 2) Clean the borehole thoroughly.
- 3) Brush the borehole 4x.
- 4) Thoroughly clean the borehole again.
- 5) Discard three full strokes of composite mortar – then inject composite mortar.
- 6) Screw in concrete screw.
- 7) After reaching the embedment depth, the composite mortar must emerge at the concrete surface.
- 8) The attachment can be installed immediately – there is no need to observe the curing time of the composite mortar.

